


FFXLCLC42

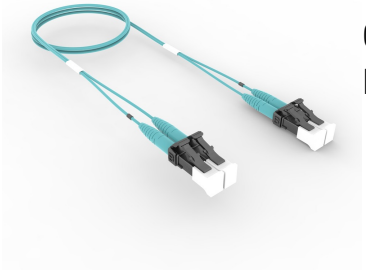

OM4 LC to LC, Fiber Patch Cord, 1.6 mm Duplex, Low Smoke Zero Halogen (LSZH)

Product Classification

| | |
|------------------------------|--|
| Regional Availability | Asia Australia/New Zealand China Europe India Latin America Middle East/Africa North America |
| Portfolio | CommScope® |
| Product Type | Fiber patch cord, duplex |
| Product Brand | SYSTIMAX InstaPATCH® 360 |
| Ordering Note | For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration Replacement for MEA Region: 2105027 |

General Specifications

| | |
|-------------------------------|-----------------|
| Color, boot A | Aqua |
| Color, boot B | Aqua |
| Color, connector A | Black |
| Color, connector B | Black |
| Interface, Connector A | LC/UPC |
| Interface, Connector B | LC/UPC |
| Jacket Color | Aqua |
| Polarity | Pairs, flipped |
| Total Fibers, quantity | 2 |
| Transmission Standards | TIA/EIA-568-C.3 |

Dimensions

| | |
|---|-------------------|
| Cable Assembly Length Range (m) | 1 – 99 |
| Cable Assembly Length Range (ft) | 1 – 325 |
| Diameter Over Jacket | 1.6 mm 0.063 in |

Ordering Tree

FFXLCLC42



Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Dual Rated LSZH/Riser

Packaging and Weights

Packaging quantity 1

Regulatory Compliance/Certifications

Agency

CHINA-ROHS

ISO 9001:2015

REACH-SVHC

ROHS

Classification

Below maximum concentration value

Designed, manufactured and/or distributed under this quality management system

Compliant as per SVHC revision on www.commscope.com/ProductCompliance

Compliant



Included Products

760021659 - LazrSPEED® 1.6 mm Low Smoke Zero Halogen Riser Zipcord
 N-002-ZC-5K-F16AQ/E Cable
 860655461

FFXLCLC42

- LC/PC Connector, Multimode, Aqua