



iCLASS SE + Other 13.56MHz + Prox Card - 396

The SIO-enabled card with MIFARE Classic or MIFARE DESFire EV1 contactless smart card as well as HID Proximity offers multiple High Frequency technologies to simplify card issuance for diverse systems or migration projects. This card offers maximized compatibility into installations that contain iCLASS SE or MIFARE Classic / MIFARE DESFire EV1 credentials.

Ensure each required option has been checked with the appropriate choice to fulfill a completed order form.

Base Model 396 Composite 40% Polyester / PVC *

iCLASS SE Memory Size and Allocation (Select one option)

- 0 - 2k Bits (256 Bytes) with 2 Application Areas (only available with MIFARE Classic 1K)
- 3 - 32k Bits (4K Bytes) Application areas 16k/2+16k/1
- 4 - 32k Bits (4K Bytes) Application areas 16k/16+16k/1

13.56 MHz Technology Card Programming (Select one option)

- R - SIO Programmed iCLASS & 2nd Technology. Specify Programming Information
- P - Programmed iCLASS with SIO only not 2nd Technology. Specify Programming Information.
- A - Configured, Non-Programmed iCLASS, SIO Programmed 2nd Technology. Specify Programming Information.

2nd High Frequency (13.56 MHz) Technology (Select one option)

- M - MIFARE Classic 1K Bytes (only available with iCLASS 2k bits)
- N - MIFARE Classic 4K Bytes
- K - MIFARE DESFire EV1 8K Bytes

125 kHz Technology Card Programming (Select one option)

- P - "HID Prox" Programmed 125 kHz Technology. Specify Programming Information
- C - "Indala/Casi Prox" Programmed 125 kHz Technology. Specify Programming Information
- N - Initialized 125 kHz Technology. Programming Information Not Required

Front Packaging (Select one option)

- G - Plain White with Gloss Finish
- C - Custom Artwork with Gloss Finish - Specify Custom Artwork Number¹

Back Packaging (Select one option)

- G - Plain White with Gloss Finish²
- C - Custom Artwork with Gloss Finish - Specify Custom Artwork Number¹
- 1 - Plain White with Gloss Finish with Magnetic Stripe²
- 3 - Custom Artwork with Gloss Finish with Magnetic Stripe - Specify Custom Artwork Number¹

iCLASS SE Card Numbering³ (Select one option)

- M - Sequential Matching Encoded/Printed (Inkjetted)⁵
- N - No Printed Card Numbering
- S - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)⁵
- R - Random Encoded/Non-Matching Sequential Printed (Inkjetted)⁵
- A - Sequential Matching Encoded/Printed (Laser Engraved)⁴
- B - Sequential Encoded/Sequential Non-Matching Printed (Laser Engraved)⁴
- C - Random Encoded/Non-Matching Sequential Printed (Laser Engraved)⁴

Slot Punch

IMPORTANT - Dual High Frequency credentials do not allow a slot punch due to the antenna design. HID recommends using a badge holder to attach this card to a lanyard or badge clip.


- N - No Slot Punch

2nd 13.56 MHz Card Numbering³ (Select one option)

- M - Sequential Matching Encoded/Printed (Inkjetted)⁵
- N - No Printed Card Numbering
- S - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)⁵
- R - Random Encoded/Non-Matching Sequential Printed (Inkjetted)⁵
- A - Sequential Matching Encoded/Printed (Laser Engraved)⁴
- B - Sequential Encoded/Sequential Non-Matching Printed (Laser Engraved)⁴
- C - Random Encoded/Non-Matching Sequential Printed (Laser Engraved)⁴

125 kHz Card Numbering³ (Select one option)

- M - Sequential Matching Encoded/Printed (Inkjetted)⁵
- N - No Printed Card Numbering
- S - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)⁵
- R - Random Encoded/Non-Matching Sequential Printed (Inkjetted)⁵
- A - Sequential Matching Encoded/Printed (Laser Engraved)⁴
- B - Sequential Encoded/Sequential Non-Matching Printed (Laser Engraved)⁴
- C - Random Encoded/Non-Matching Sequential Printed (Laser Engraved)⁴

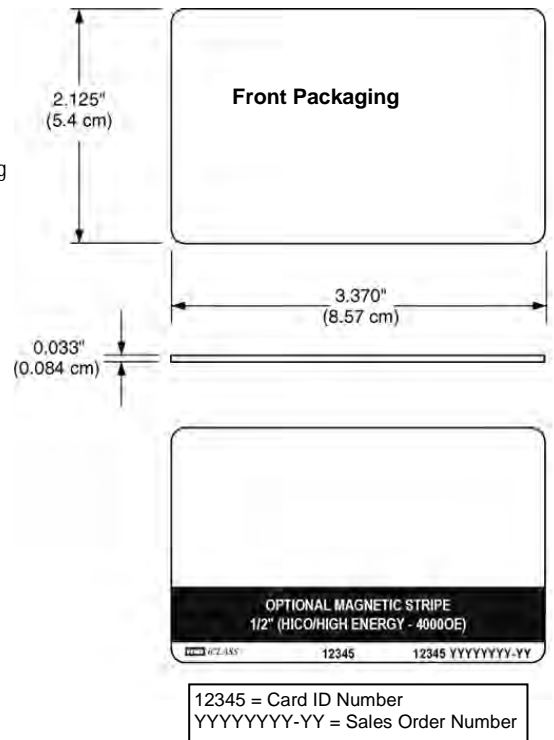

12345 = Card ID Number
 YYYYYYYY-YY = Sales Order Number