


Single-Panel Housing (SPH-01P)

A LANscape®
Solutions Product


features and benefits |

Splice management and/or cross-connect	Versatility
Black metal construction	Durability and protection
Top and bottom cable entry grommets	Midspan access and environmental sealing
Accepts Plug & Play™ Universal Systems clip	Ease of cable assembly installation

Corning Cable Systems Single-Panel Housing (SPH-01P) is a cost-effective housing for storage, protection and termination of optical fiber cables. The SPH-01P accepts standard LANscape® Solutions CCH connector panels and offers protection for the fiber cable and connectors for indoor wall-mount installations. This compact unit has a 1.5 in projection from the wall and is designed for use in locations such as building entrance terminals, wiring closets, open office and other controlled environments where space is a premium. The durable black metal housing can be used for splice management, cross-connect, or both for up to 12 fibers and includes a 6-slot, 0.4-in splice holder accommodating up to 12 heat-shrink splices. Top and bottom cable entry grommets are provided for midspan access and environmental sealing, creating an effective solution for customer premises or remote locations.

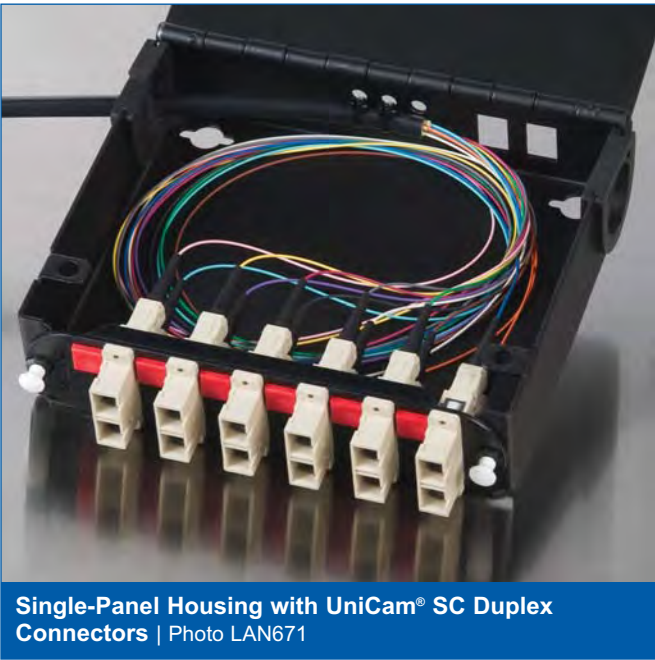


Single-Panel Housing with UniCam® SC Duplex Connectors | Photo LAN671

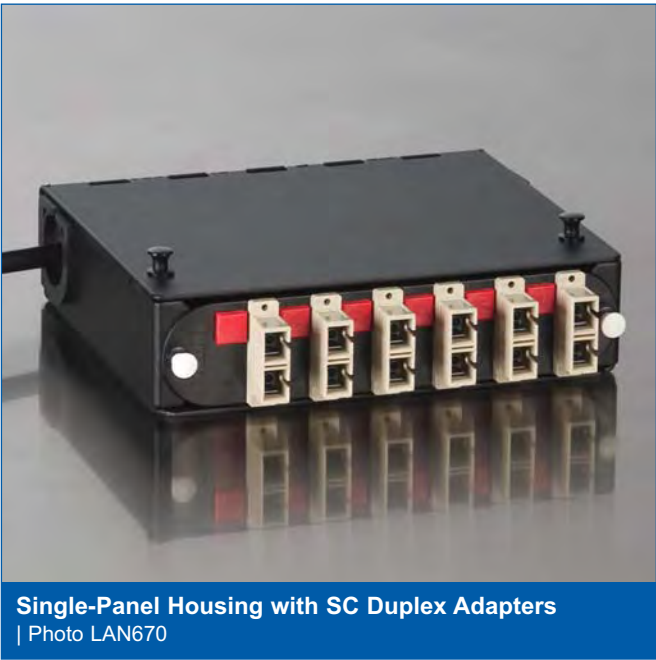

Single-Panel Housing with SC Duplex Adapters | Photo LAN670

Single-Panel Housing (SPH-01P)

A LANscape®
Solutions Product

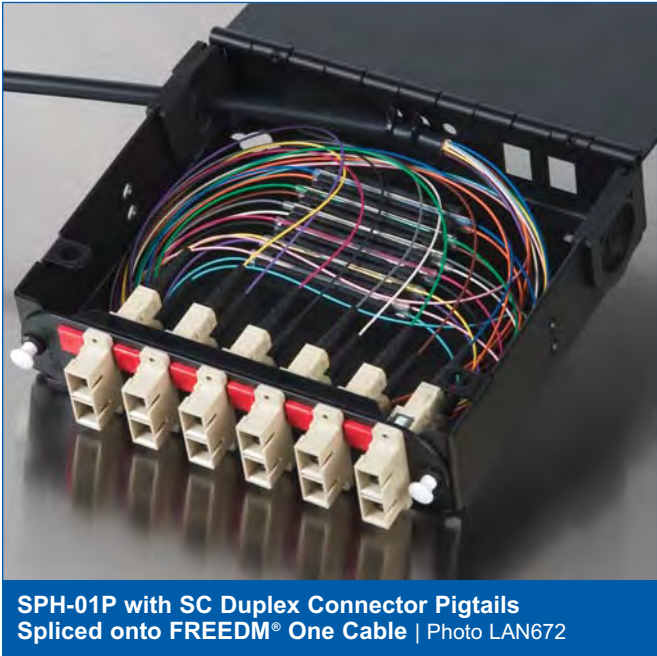

specifications |

	Dimensions (H x W x D) cm (in)	Shipping Weight kg (lb)
SPH-01P	16 x 14 x 5 (6.3 x 5.5 x 2)	0.5 (1.1)

ordering information |

Part Number	Description
SPH-01P	Single-Panel, Wall-Mount Housing; accepts 1 CCH connector panel; also includes a 6-slot, 0.4-in splice holder and can be used for splice management, cross-connect or both up to 12 fibers; CCH panels ordered separately
Accessories	
SPH-01P-BKT	Ledge-Mount Bracket used to mount to the top of a ledge
CCH-CP12-E4	CCH Panel with 12-fiber, LC duplex adapters for laser-optimized multimode 50 µm fiber*

*Other CCH panel configurations also available.

Corning Cable Systems LLC • PO Box 489 • Hickory, NC 28603-0489 USA
800-743-2675 • FAX: 828-901-5973 • International: +1-828-901-5000 • www.corning.com/cablesystems

Corning Cable Systems reserves the right to improve, enhance and modify the features and specifications of Corning Cable Systems products without prior notification. FREEDM, LANscape and UniCam are registered trademarks of Corning Cable Systems Brands, Inc. Plug & Play is a trademark of Corning Cable Systems Brands, Inc. All other trademarks are the properties of their respective owners. Corning Cable Systems is ISO 9001 certified. © 2005, 2009 Corning Cable Systems. All rights reserved. Published in the USA.
LAN-659-EN / April 2009